EDTY
SCHWABISCH HALL

JEPPESEN SCHWABISCH HALL, GERMANY

22 OCT 04 (11-1) Eff 28 Oct CAT A & B ILS DME Rwy 28

BRIEFING STRIP™

LANGEN Radar	*SCHWABISCH HALL Info within 25 NM up to 4000' AGL
125.05	129.22

LOC ISWH	Final Apch Crs	GS ESUVA	ILS DA(H)	Apt Elev 1311'
111.5	278°	5000'(3702')	Refer to Minimums	RWY 1298'

MISSED APCH: Climb on track 278° to D5.1 SHD or 4000', whichever is later, then turn RIGHT on R-274 DKB to VOR climbing to 5000'.



MSA
DKB VOR

Alt Set: hPa (IN on req) Rwy Elev: 47 hPa Trans level: By ATC Trans alt: 5000'

1. Arrivals leaving controlled airspace when passing 2500 GND.
2. Procedure not to be used during activity of Night Low Flying System (NLFS).

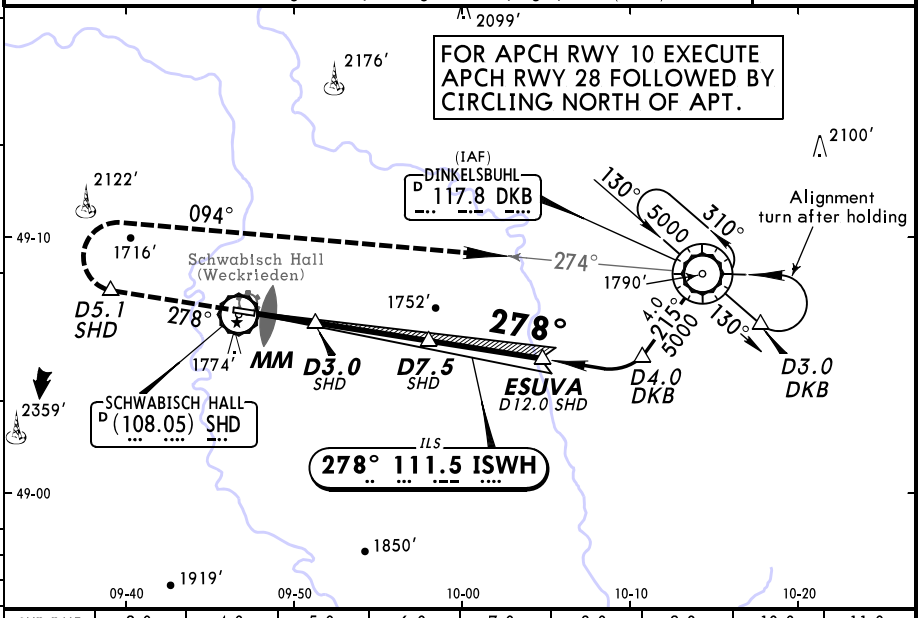

SHD DME	2.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0
ALTITUDE	1830'	2470'	2790'	3100'	3420'	3740'	4060'	4380'	4700'

1 in=7.5 NM

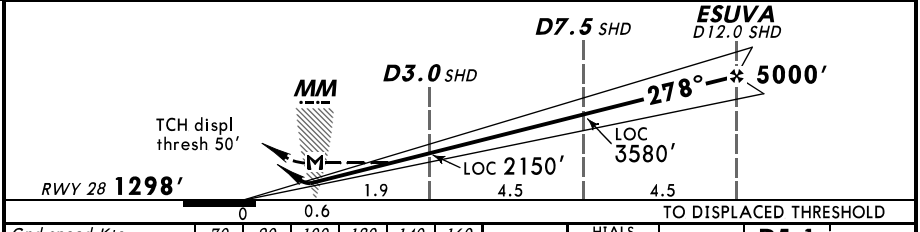

Gnd speed-Kts	70	90	100	120	140	160
ILS GS 3.00° or Descent Gradient 5.2%	377	484	538	646	753	861
MAP at MM						

HIALS
PAPI

278°

D5.1 SHD 4000' whichever is later

JAR-OPS STRAIGHT-IN LANDING RWY 28

ILS		LOC (GS out)		
DA(H) A: 1498'(200') B: 1504'(206')		MDA(H) 1750'(452')		
FULL	ALS out		MM out	ALS out
A RVR 700m	RVR 1000m	RVR 1400m	NOT AUTH	RVR 1500m
B		RVR 1500m		
C NOT APPLICABLE				
D				

CIRCLE-TO-LAND

Not authorized South of airport

Max Kts	MDA(H)	VIS
100	2310'(999')	1500m
135	2310'(999')	1600m
C	NOT APPLICABLE	
D		

PANS OPS 4

CHANGES: New procedure.

© JEPPESEN SANDERSON, INC., 2004. ALL RIGHTS RESERVED.